

European Headquarters


Tiger-Vac Europa S.R.L.
Via Marie Curie 17
Zona Industriale Ponte Rizzoli
Ozzano Emilia, BO 40064

Tel: ((39) 051 79.53.52)
Fax: ((39) 051 4695077)
Website: <http://www.tiger-vac.eu>
Email: info@tiger-vac.it

International Headquarters

Tiger-Vac International Inc.
2020 Dagenais Blvd. Ouest
Laval, Quebec
Canada H7L 5W2

Tel: (450-625-0099)
Fax: (450-625-3388)
Website: <http://www.tiger-vac.com>
Email: sales@tiger-vac.com

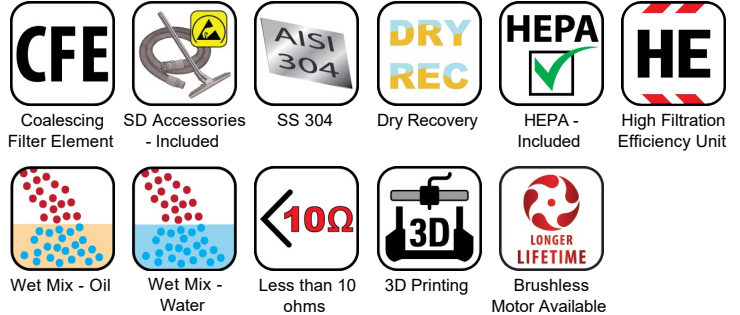

Specifications For 2D-10 (IT-40L) DT CFE HEPA ORDLOC-652 W/3D TOOL KIT

Please note that specifications are subject to change without notice

Technical Sheet For 2D-10 (IT-40L) DT CFE HEPA ORDLOC-652 W/3D TOOL KIT

COALESCING FILTER ELEMENT - Included

Part #	Description
215792A-HEPA	REPLACEMENT COALESCING FILTER ELEMENT, HEPA GRADE, 4.75" HIGH, w/NITRILE GASKET #219259-04

MIST ARESTOR PACK - Included

Part #	Description
218282	MIST ARRESTOR SCREENS, MADE OF ALUMINUM MESH, FOR IT-40L (SET OF 6 SCREENS)
218284	MIST ARRESTOR PACK ASSEMBLY (ALUMINUM SCREENS WITH STAINLESS STEEL MESH)

CONDUCTIVE RECOVERY BAG - Included

Part #	Description
219992A	CONDUCTIVE RECOVERY BAG FOR IT-40L MINI ENHANCED
219992	CONDUCTIVE RECOVERY BAG FOR IT-40L MINI ENHANCED (PACKAGE OF 3)

DEPRESSOR CAGE FOR CONDUCTIVE RECOVERY BAG - Optional

Part #	Description
228093	DEPRESSOR CAGE FOR CONDUCTIVE WET RECOVERY BAG FOR IT-40L, MADE OF TYPE 304 STAINLESS STEEL

TOOLS AND ACCESSORIES - Included

Part #	Description
383440	STATIC CONDUCTIVE CRUSHPROOF SUCTION HOSE ASSEMBLY 1.5"(38mm) x 10'(3m) FOR 1.5" CAMLOCK INTAKE
383312A	ROUND BRUSH ASSEMBLY, ESD SAFE PLASTIC, FOR USE WITH 1.5" (38mm) HOSE
381818	CREVICE TOOL 1.5"(38mm) x 8"(20cm) w/1.5" ALUMINUM TUBE, BLACK RUBBER, CONDUCTIVE & OIL RESISTANT
383462	CONICAL NOZZLE ASMBLY w/CURVED TIP, 10"(25cm) CONDUCTIVE RUBBER, PRESSURE FIT (323562+381155A-H)

TOOLS AND ACCESSORIES - Optional

Part #	Description
381477	DOUBLE BEND WAND (2pc) 1.5" (38mm) x 54" (137cm), CHROME, w/TAPER FOR PLASTIC FLOOR TOOLS
381448A	UTILITY FLOOR TOOL, Ø1.5"(Ø38mm) x 12"(30cm), STATIC CONDUCTIVE PLASTIC w/CONDUCTIVE NYLON BRISTLES