


Characteristics

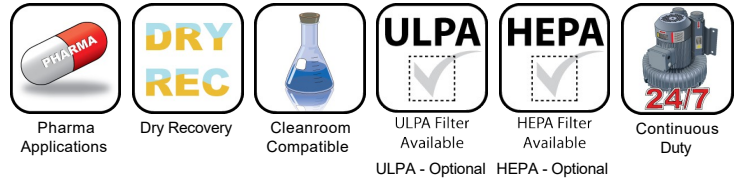

- HEPA filter with an efficiency of 99.995% at 0.3 micron. Tested IEST-RP-CC001. H14 by MPPS method as per EN 1822 and OSHA compliant. All of our HEPA vacuum systems are aerosol leak tested before leaving our facility - optional
- ULPA filter with an efficiency of 99.999% at 0.12 micron. Filtration efficiency of 99.9995% at 0.18 micron. Tested IEST-RP-CC001. U15 by MPPS method as per EN 1822. All of our ULPA vacuum systems are aerosol leak tested before leaving our facility - optional
- Cleanroom compatible with ISO Class 4 (former Class 10)
- Designed to be attached to process machines and for general cleanup in the Food industry
- Can also be used for the recovery of tablets in the Pharmaceutical industry
- Continuous duty single phase or 3-phase motor mounted vertically
- Includes disposable filter bags
- Available in a fixed or mobile unit
- For dry recovery only
- Available in stainless steel, white powder coated or stainless steel & white powder coated versions
- Vertical mounting for areas with space constraints
- 4 wheels for easy maneuverability

Specifications

CD-1500 CR (PFB) SERIES	111574B1	111574B3	111575B1	111575B3	111578B1	111578B3
Model Name	CD-1500 CR (PFB) - P/C & S/S	CD-1500 CR (PFB) - P/C & S/S	CD-1500 CR (PFB) - P/C & S/S	CD-1500 CR (PFB) - P/C & S/S	CD-1500 CR (PFB) - STAINLESS STEEL	CD-1500 CR (PFB) - STAINLESS STEEL
Type (Powerhead)	Electric	Electric	Electric	Electric	Electric	Electric
TEFC Motor	Yes	Yes	Yes	Yes	Yes	Yes
Tension	400 V	230 V	400 V	230 V	400 V	230 V
Frequency	50 Hz	50 Hz	50 Hz	50 Hz	50 Hz	50 Hz
Phase	Three	Single	Three	Single	Three	Single
Wattage	900 W	900 W	1300 W	1300 W	900 W	900 W
Power	0.90 kW	0.90 kW	1.3 kW	1.3 kW	0.90 kW	0.90 kW
Amperage	1.9 A	9 A	2.7 A	10 A	1.9 A	9 A
Air Flow	187 m ³ /h	187 m ³ /h	204 m ³ /h	187 m ³ /h	187 m ³ /h	187 m ³ /h
Vacuum Pressure	2540 mm H ₂ O	2540 mm H ₂ O	3300 mm H ₂ O	2790 mm H ₂ O	2540 mm H ₂ O	2540 mm H ₂ O
VRV Setting	1780 mm H ₂ O	1780 mm H ₂ O	2030 mm H ₂ O	2030 mm H ₂ O	1780 mm H ₂ O	1780 mm H ₂ O
Sound Level	64 dB(A)	64 dB(A)	65 dB(A)	65 dB(A)	64 dB(A)	64 dB(A)
Type of Power Outlet	Not Included	Not Included	Not Included	Not Included	Not Included	Not Included
Suction Inlet Port	50 mm	50 mm	50 mm	50 mm	50 mm	50 mm
Cart Type	Carriage Base (CB)	Carriage Base (CB)	Carriage Base (CB)	Carriage Base (CB)	Carriage Base (CB)	Carriage Base (CB)
Filter Cleaning	None	None	None	None	None	None
Dust Recovery Tank	19 L	19 L	19 L	19 L	19 L	19 L
Dry Recovery - Disposable Filter Bag	15 L	15 L	15 L	15 L	15 L	15 L
Length	34 cm	34 cm	34 cm	34 cm	34 cm	34 cm
Width	50 cm	50 cm	51 cm	51 cm	50 cm	50 cm
Height	94 cm	94 cm	94 cm	94 cm	94 cm	94 cm
Weight (Vacuum Only)	57 kg.	57 kg.	58 kg.	58 kg.	49 kg.	49 kg.
Cord Length	10 m	10 m	10 m	10 m	10 m	10 m
CD-1500 CR (PFB) SERIES	111579B1	111579B3				
Model Name	CD-1500 CR (PFB) - STAINLESS STEEL	CD-1500 CR (PFB) - STAINLESS STEEL				
Type (Powerhead)	Electric	Electric				
TEFC Motor	Yes	Yes				
Tension	400 V	230 V				
Frequency	50 Hz	50 Hz				
Phase	Three	Single				

Wattage	1300 W	1300 W
Power	1.3 kW	1.3 kW
Amperage	2.7 A	10 A
Air Flow	204 m ³ /h	187 m ³ /h
Vacuum Pressure	3300 mm H ₂ O	2790 mm H ₂ O
VRV Setting	2030 mm H ₂ O	2030 mm H ₂ O
Sound Level	65 dB(A)	65 dB(A)
Type of Power Outlet	Not Included	Not Included
Suction Inlet Port	50 mm	50 mm
Cart Type	Carriage Base (CB)	Carriage Base (CB)
Filter Cleaning	None	None
Dust Recovery Tank	19 L	19 L
Dry Recovery - Disposable Filter Bag	15 L	15 L
Length	36 cm	36 cm
Width	51 cm	51 cm
Height	94 cm	94 cm
Weight (Vacuum Only)	50 kg.	50 kg.
Cord Length	10 m	10 m

Please note that specifications are subject to change without notice

Use only recommended tools & accessories



Clear Polyliner Recovery Bags - Included



Disposable Filter Bag - Included



Tools and Accessories (Toolkit 4B) - Optional