


Characteristics

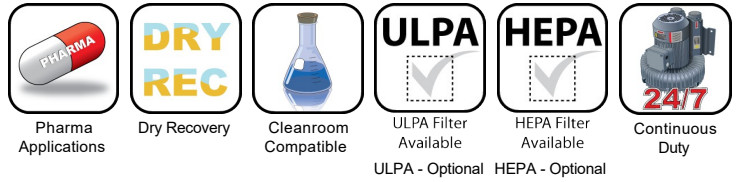

- HEPA filter with an efficiency of 99.995% at 0.3 micron. Tested IEST-RP-CC001. H14 by MPPS method as per EN 1822 and OSHA compliant. All of our HEPA vacuum systems are aerosol leak tested before leaving our facility - optional
- ULPA filter with an efficiency of 99.999% at 0.12 micron. Filtration efficiency of 99.9995% at 0.18 micron. Tested IEST-RP-CC001. U15 by MPPS method as per EN 1822. All of our ULPA vacuum systems are aerosol leak tested before leaving our facility - optional
- Cleanroom compatible with ISO Class 4 (former Class 10)
- Designed to be attached to process machines and for general cleanup in the Food industry
- Can also be used for the recovery of tablets in the Pharmaceutical industry
- Continuous duty single phase or 3-phase motor mounted vertically
- Available in a fixed or mobile unit
- For dry recovery only
- Available in stainless steel, white powder coated or stainless steel & white powder coated versions
- Vertical mounting for areas with space constraints
- 4 wheels for easy maneuverability

Specifications

CD-1501 CR (STD) SERIES	110984B1	110984B3	110986B1	110986B3
Model Name	CD-1501 CR (STD) - P/C & S/S	CD-1501 CR (STD) - P/C & S/S	CD-1501 CR (STD) - STAINLESS STEEL	CD-1501 CR (STD) - STAINLESS STEEL
Type (Powerhead)	Electric	Electric	Electric	Electric
TEFC Motor	Yes	Yes	Yes	Yes
Tension	230 V	400 V	230 V	400 V
Frequency	50 Hz	50 Hz	50 Hz	50 Hz
Phase	Single	Three	Single	Three
Wattage	1750 W	1750 W	1750 W	1750 W
Power	1.7 kW	1.7 kW	1.7 kW	1.7 kW
Amperage	9 A	3 A	9 A	3 A
Air Flow	238 m ³ /h	238 m ³ /h	238 m ³ /h	238 m ³ /h
Vacuum Pressure	2820+ mm H ₂ O	2820+ mm H ₂ O	2820+ mm H ₂ O	2820+ mm H ₂ O
VRV Setting	2795 mm H ₂ O	2795 mm H ₂ O	2795 mm H ₂ O	2795 mm H ₂ O
Sound Level	64 dB(A)	64 dB(A)	64 dB(A)	64 dB(A)
Type of Power Outlet	Not Included	Not Included	Not Included	Not Included
Suction Inlet Port	50 mm	50 mm	50 mm	50 mm
Cart Type	Carriage Base (CB)	Carriage Base (CB)	Carriage Base (CB)	Carriage Base (CB)
Filter Cleaning	None	None	None	None
Dust Recovery Tank	28.4 L	28.4 L	28.4 L	28.4 L
Dry Recovery - Disposable Filter Bag	15 L	15 L	15 L	15 L
Length	34 cm	34 cm	34 cm	34 cm
Width	50 cm	50 cm	50 cm	50 cm
Height	109 cm	109 cm	109 cm	109 cm
Weight (Vacuum Only)	51.5 kg.	51.5 kg.	51.5 kg.	51.5 kg.
Cord Length	10 m	10 m	10 m	10 m

Please note that specifications are subject to change without notice

Use only recommended tools & accessories



Tools and Accessories (Toolkit 4B) - Optional