


### Characteristics

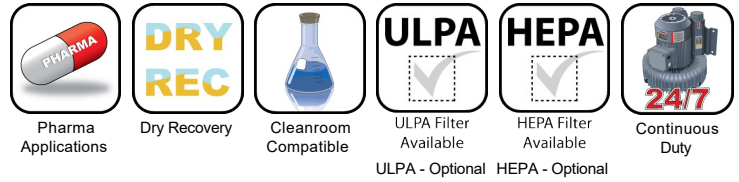

- HEPA filter with an efficiency of 99.995% at 0.3 micron. Tested IEST-RP-CC001. H14 by MPPS method as per EN 1822 and OSHA compliant. All of our HEPA vacuum systems are aerosol leak tested before leaving our facility - optional
- ULPA filter with an efficiency of 99.999% at 0.12 micron. Filtration efficiency of 99.9995% at 0.18 micron. Tested IEST-RP-CC001. U15 by MPPS method as per EN 1822. All of our ULPA vacuum systems are aerosol leak tested before leaving our facility - optional
- Cleanroom compatible with ISO Class 4 (former Class 10)
- Designed to be attached to process machines and for general cleanup in the Food industry
- Can also be used for the recovery of tablets in the Pharmaceutical industry
- Continuous duty single phase or 3-phase motor mounted vertically
- Includes disposable filter bags
- Available in a fixed or mobile unit
- For dry recovery only
- Available in stainless steel, white powder coated or stainless steel & white powder coated versions
- Vertical mounting for areas with space constraints
- 4 wheels for easy maneuverability

## Specifications

CD-1500 CR (PFB) SERIES	111574B1	111574B3	111575B1	111575B3	111578B1	111578B3
<b>Model Name</b>	CD-1500 CR (PFB) - P/C & S/S	CD-1500 CR (PFB) - P/C & S/S	CD-1500 CR (PFB) - P/C & S/S	CD-1500 CR (PFB) - P/C & S/S	CD-1500 CR (PFB) - STAINLESS STEEL	CD-1500 CR (PFB) - STAINLESS STEEL
<b>Type (Powerhead)</b>	Electric	Electric	Electric	Electric	Electric	Electric
<b>TEFC Motor</b>	Yes	Yes	Yes	Yes	Yes	Yes
<b>Tension</b>	400 V	230 V	400 V	230 V	400 V	230 V
<b>Frequency</b>	50 Hz	50 Hz	50 Hz	50 Hz	50 Hz	50 Hz
<b>Phase</b>	Three	Single	Three	Single	Three	Single
<b>Wattage</b>	900 W	900 W	1300 W	1300 W	900 W	900 W
<b>Power</b>	0.90 kW	0.90 kW	1.3 kW	1.3 kW	0.90 kW	0.90 kW
<b>Amperage</b>	1.9 A	9 A	2.7 A	10 A	1.9 A	9 A
<b>Air Flow</b>	187 m <sup>3</sup> /h	187 m <sup>3</sup> /h	204 m <sup>3</sup> /h	187 m <sup>3</sup> /h	187 m <sup>3</sup> /h	187 m <sup>3</sup> /h
<b>Vacuum Pressure</b>	2540 mm H <sub>2</sub> O	2540 mm H <sub>2</sub> O	3300 mm H <sub>2</sub> O	2790 mm H <sub>2</sub> O	2540 mm H <sub>2</sub> O	2540 mm H <sub>2</sub> O
<b>VRV Setting</b>	1780 mm H <sub>2</sub> O	1780 mm H <sub>2</sub> O	2030 mm H <sub>2</sub> O	2030 mm H <sub>2</sub> O	1780 mm H <sub>2</sub> O	1780 mm H <sub>2</sub> O
<b>Sound Level</b>	64 dB(A)	64 dB(A)	65 dB(A)	65 dB(A)	64 dB(A)	64 dB(A)
<b>Type of Power Outlet</b>	Not Included	Not Included	Not Included	Not Included	Not Included	Not Included
<b>Suction Inlet Port</b>	50 mm	50 mm	50 mm	50 mm	50 mm	50 mm
<b>Cart Type</b>	Carriage Base (CB)	Carriage Base (CB)	Carriage Base (CB)	Carriage Base (CB)	Carriage Base (CB)	Carriage Base (CB)
<b>Filter Cleaning</b>	None	None	None	None	None	None
<b>Dust Recovery Tank</b>	19 L	19 L	19 L	19 L	19 L	19 L
<b>Dry Recovery - Disposable Filter Bag</b>	15 L	15 L	15 L	15 L	15 L	15 L
<b>Length</b>	34 cm	34 cm	34 cm	34 cm	34 cm	34 cm
<b>Width</b>	50 cm	50 cm	51 cm	51 cm	50 cm	50 cm
<b>Height</b>	94 cm	94 cm	94 cm	94 cm	94 cm	94 cm
<b>Weight (Vacuum Only)</b>	57 kg.	57 kg.	58 kg.	58 kg.	49 kg.	49 kg.
<b>Cord Length</b>	10 m	10 m	10 m	10 m	10 m	10 m
CD-1500 CR (PFB) SERIES	111579B1	111579B3				
<b>Model Name</b>	CD-1500 CR (PFB) - STAINLESS STEEL	CD-1500 CR (PFB) - STAINLESS STEEL				
<b>Type (Powerhead)</b>	Electric	Electric				
<b>TEFC Motor</b>	Yes	Yes				
<b>Tension</b>	400 V	230 V				
<b>Frequency</b>	50 Hz	50 Hz				
<b>Phase</b>	Three	Single				

<b>Wattage</b>	1300 W	1300 W
<b>Power</b>	1.3 kW	1.3 kW
<b>Amperage</b>	2.7 A	10 A
<b>Air Flow</b>	204 m <sup>3</sup> /h	187 m <sup>3</sup> /h
<b>Vacuum Pressure</b>	3300 mm H <sub>2</sub> O	2790 mm H <sub>2</sub> O
<b>VRV Setting</b>	2030 mm H <sub>2</sub> O	2030 mm H <sub>2</sub> O
<b>Sound Level</b>	65 dB(A)	65 dB(A)
<b>Type of Power Outlet</b>	Not Included	Not Included
<b>Suction Inlet Port</b>	50 mm	50 mm
<b>Cart Type</b>	Carriage Base (CB)	Carriage Base (CB)
<b>Filter Cleaning</b>	None	None
<b>Dust Recovery Tank</b>	19 L	19 L
<b>Dry Recovery - Disposable Filter Bag</b>	15 L	15 L
<b>Length</b>	36 cm	36 cm
<b>Width</b>	51 cm	51 cm
<b>Height</b>	94 cm	94 cm
<b>Weight (Vacuum Only)</b>	50 kg.	50 kg.
<b>Cord Length</b>	10 m	10 m

Please note that specifications are subject to change without notice

## Use only recommended tools & accessories



Clear Polyliner Recovery Bags - Included



Disposable Filter Bag - Included



Tools and Accessories (Toolkit 4B) - Optional