


Characteristics

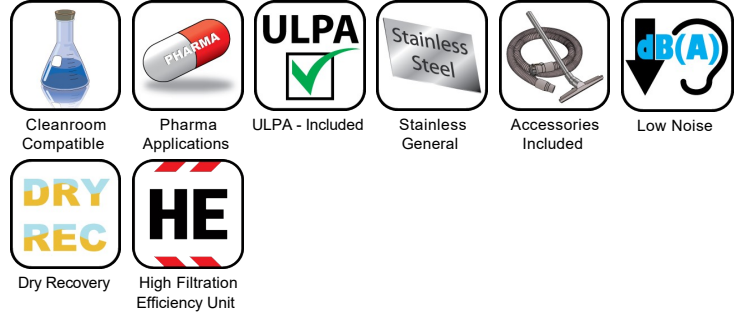

- ULPA filter with an efficiency of 99.999% at 0.12 micron. Filtration efficiency of 99.9995% at 0.18 micron. Tested IEST-RP-CC001. U15 by MPPS method as per EN 1822. All of our ULPA vacuum systems are aerosol leak tested before leaving our facility - included
- Cleanroom compatible with ISO Class 4 (former Class 10). Can be used in the Pharmaceutical industry
- 3-stage filtration system, includes an ULPA (U15) filter, main cloth filter, and disposable filter bags
- Designed for use in contamination controlled environments
- Thru-Flow heavy duty motor
- Low noise level - only 60 dB(A) at 6.6' (2m)
- For dry recovery only
- Available with a plastic or stainless steel recovery tank
- Mounted on a 4-wheel dolly for easy maneuverability
- Includes a complete tool kit.

Specifications

| CR-1 ULPA | 110760B | 110760BP | 110760C | 110760CP | 110760D | 110760DP |
|---|--------------------------|--------------------------|--------------------------|--------------------------|--------------------------|--------------------------|
| Model Name | CR-1 ULPA | CR-1 ULPA | CR-1 ULPA | CR-1 ULPA | CR-1 ULPA | CR-1 ULPA |
| Type (Powerhead) | Electric | Electric | Electric | Electric | Electric | Electric |
| Tension | 240 V | 240 V | 240 V | 240 V | 240 V | 240 V |
| Frequency | 50 Hz | 50 Hz | 50 Hz | 50 Hz | 50 Hz | 50 Hz |
| Phase | Single | Single | Single | Single | Single | Single |
| Wattage | 1000 W | 1000 W | 1000 W | 1000 W | 1000 W | 1000 W |
| Power | 1 kW | 1 kW | 1 kW | 1 kW | 1 kW | 1 kW |
| Amperage | 4.3 A | 4.3 A | 4.3 A | 4.3 A | 4.3 A | 4.3 A |
| Air Flow | 163 m ³ /h | 163 m ³ /h | 163 m ³ /h | 163 m ³ /h | 163 m ³ /h | 163 m ³ /h |
| Vacuum Pressure | 2510 mm H ₂ O | 2510 mm H ₂ O | 2510 mm H ₂ O | 2510 mm H ₂ O | 2510 mm H ₂ O | 2510 mm H ₂ O |
| Sound Level | 60 dB(A) | 60 dB(A) | 60 dB(A) | 60 dB(A) | 60 dB(A) | 60 dB(A) |
| Type of Power Outlet | European | European | UK | UK | Swiss | Swiss |
| Suction Inlet Port | 38 mm | 38 mm | 38 mm | 38 mm | 38 mm | 38 mm |
| Cart Type | 4 Wheel Dolly (4W) | 4 Wheel Dolly (4W) | 4 Wheel Dolly (4W) | 4 Wheel Dolly (4W) | 4 Wheel Dolly (4W) | 4 Wheel Dolly (4W) |
| Filter Cleaning | None | None | None | None | None | None |
| Dust Recovery Tank | 15.1 L | 15.1 L | 15.1 L | 15.1 L | 15.1 L | 15.1 L |
| Dry Recovery - Disposable Filter Bag | 8 L | 8 L | 8 L | 8 L | 8 L | 8 L |
| Length | 41 cm | 41 cm | 41 cm | 41 cm | 41 cm | 41 cm |
| Width | 41 cm | 41 cm | 41 cm | 41 cm | 41 cm | 41 cm |
| Height | 56 cm | 56 cm | 56 cm | 56 cm | 56 cm | 56 cm |
| Weight (Vacuum Only) | 9 kg. | 9 kg. | 9 kg. | 9 kg. | 9 kg. | 9 kg. |
| Cord Length | 10 m | 10 m | 10 m | 10 m | 10 m | 10 m |
| CR-1 ULPA | 110760E | 110760EP | 110762B | 110762BP | 110762C | 110762CP |
| Model Name | CR-1 ULPA | CR-1 ULPA | CR-1 ULPA | CR-1 ULPA | CR-1 ULPA | CR-1 ULPA |
| Type (Powerhead) | Electric | Electric | Electric | Electric | Electric | Electric |
| Tension | 240 V | 240 V | 240 V | 240 V | 240 V | 240 V |
| Frequency | 50 Hz | 50 Hz | 50 Hz | 50 Hz | 50 Hz | 50 Hz |
| Phase | Single | Single | Single | Single | Single | Single |
| Wattage | 1000 W | 1000 W | 1000 W | 1000 W | 1000 W | 1000 W |
| Power | 1 kW | 1 kW | 1 kW | 1 kW | 1 kW | 1 kW |
| Amperage | 4.3 A | 4.3 A | 4.3 A | 4.3 A | 4.3 A | 4.3 A |
| Air Flow | 163 m ³ /h | 163 m ³ /h | 163 m ³ /h | 163 m ³ /h | 163 m ³ /h | 163 m ³ /h |
| Vacuum Pressure | 2510 mm H ₂ O | 2510 mm H ₂ O | 2510 mm H ₂ O | 2510 mm H ₂ O | 2510 mm H ₂ O | 2510 mm H ₂ O |
| Sound Level | 60 dB(A) | 60 dB(A) | 60 dB(A) | 60 dB(A) | 60 dB(A) | 60 dB(A) |

| | | | | | | |
|---|--------------------------|--------------------------|--------------------------|--------------------------|--------------------|--------------------|
| Type of Power Outlet | Chinese | Chinese | European | European | UK | UK |
| Suction Inlet Port | 38 mm | 38 mm | 38 mm | 38 mm | 38 mm | 38 mm |
| Cart Type | 4 Wheel Dolly (4W) | 4 Wheel Dolly (4W) | 4 Wheel Dolly (4W) | 4 Wheel Dolly (4W) | 4 Wheel Dolly (4W) | 4 Wheel Dolly (4W) |
| Filter Cleaning | None | None | None | None | None | None |
| Dust Recovery Tank | 15.1 L | 15.1 L | 15.1 L | 15.1 L | 15.1 L | 15.1 L |
| Dry Recovery - Disposable Filter Bag | 8 L | 8 L | 8 L | 8 L | 8 L | 8 L |
| Length | 41 cm | 41 cm | 41 cm | 41 cm | 41 cm | 41 cm |
| Width | 41 cm | 41 cm | 41 cm | 41 cm | 41 cm | 41 cm |
| Height | 56 cm | 56 cm | 56 cm | 56 cm | 56 cm | 56 cm |
| Weight (Vacuum Only) | 9 kg. | 9 kg. | 9 kg. | 9 kg. | 9 kg. | 9 kg. |
| Cord Length | 10 m | 10 m | 10 m | 10 m | 10 m | 10 m |
| CR-1 ULPA | 110762D | 110762DP | 110762E | 110762EP | | |
| Model Name | CR-1 ULPA | CR-1 ULPA | CR-1 ULPA | CR-1 ULPA | | |
| Type (Powerhead) | Electric | Electric | Electric | Electric | | |
| Tension | 240 V | 240 V | 240 V | 240 V | | |
| Frequency | 50 Hz | 50 Hz | 50 Hz | 50 Hz | | |
| Phase | Single | Single | Single | Single | | |
| Wattage | 1000 W | 1000 W | 1000 W | 1000 W | | |
| Power | 1 kW | 1 kW | 1 kW | 1 kW | | |
| Amperage | 4.3 A | 4.3 A | 4.3 A | 4.3 A | | |
| Air Flow | 163 m ³ /h | 163 m ³ /h | 163 m ³ /h | 163 m ³ /h | | |
| Vacuum Pressure | 2510 mm H ₂ O | 2510 mm H ₂ O | 2510 mm H ₂ O | 2510 mm H ₂ O | | |
| Sound Level | 60 dB(A) | 60 dB(A) | 60 dB(A) | 60 dB(A) | | |
| Type of Power Outlet | Swiss | Swiss | Chinese | Chinese | | |
| Suction Inlet Port | 38 mm | 38 mm | 38 mm | 38 mm | | |
| Cart Type | 4 Wheel Dolly (4W) | 4 Wheel Dolly (4W) | 4 Wheel Dolly (4W) | 4 Wheel Dolly (4W) | | |
| Filter Cleaning | None | None | None | None | | |
| Dust Recovery Tank | 15.1 L | 15.1 L | 15.1 L | 15.1 L | | |
| Dry Recovery - Disposable Filter Bag | 8 L | 8 L | 8 L | 8 L | | |
| Length | 41 cm | 41 cm | 41 cm | 41 cm | | |
| Width | 41 cm | 41 cm | 41 cm | 41 cm | | |
| Height | 56 cm | 56 cm | 56 cm | 56 cm | | |
| Weight (Vacuum Only) | 9 kg. | 9 kg. | 9 kg. | 9 kg. | | |

Use only recommended tools & accessories

ULPA Filter for CR-1 ULPA - Included



Main Cloth Filter - Included



A complete tool kit is included (Part No. 323495)



A package of 5 synthetic recovery bags is included (Part No. 212500)



CR-1 ULPA with Stainless Steel Recovery Tank



#214860 HEPA/ULPA Filter Protector/Housing Kit - Available